



XKP INTELLIGENT VARIABLE SPEED PUMP

Product overview

The XKP intelligent variable speed pump is suitable for swimming pools, water features, hot springs, saunas and baths. It adopts an efficient permanent magnet motor and variable-frequency control technology, supporting stepless speed adjustment from 30% to 100%. It is energy-efficient, intelligent, and quiet in operation. It has a strong self-suction capacity of 6 meters, applicable to various usage scenarios; equipped with a 4L large-capacity filter basket, reducing cleaning frequency and making maintenance more convenient. It is equipped with a high-resolution display screen, with intuitive and convenient operation, and is an efficient, stable, and intelligent circulation water pump.



Silent Operation



Intelligent and Smart Control



Strong Self-Priming



Smart safety assurance



Intelligent and Smart Control

- 4 time periods can be freely set for the water pump to start and stop within 24 hours;
- 30-100% customizable speed range with 4 preset modes (1200rpm, 2000rpm, 3200rpm, 4000rpm).



External rainproof back cover

- Adhesive rainproof cover: Better separates the motor from the rainwater, and the detachable external rainproof cover is easier to disassemble and assemble;
- IPX5 waterproof rating;
- Liquid Temperature: 5~50°C (41~122°F);
- Ambient Temperature: up to 40°C (104°F);
- Maxi. Working pressure: 3.0 bar;
- Insulation Class: F



Strong self-priming up to 6m within 6mins.



Multiple Languages

English, French, German, Spanish, Italian and Chinese.




Intelligent safety guarantee, safer and more durable

- Built-in over/under voltage protection to prevent motor burnout from overload;
- Dry-run protection.




4L large-capacity filter basket


XKP757BP QH. Curve

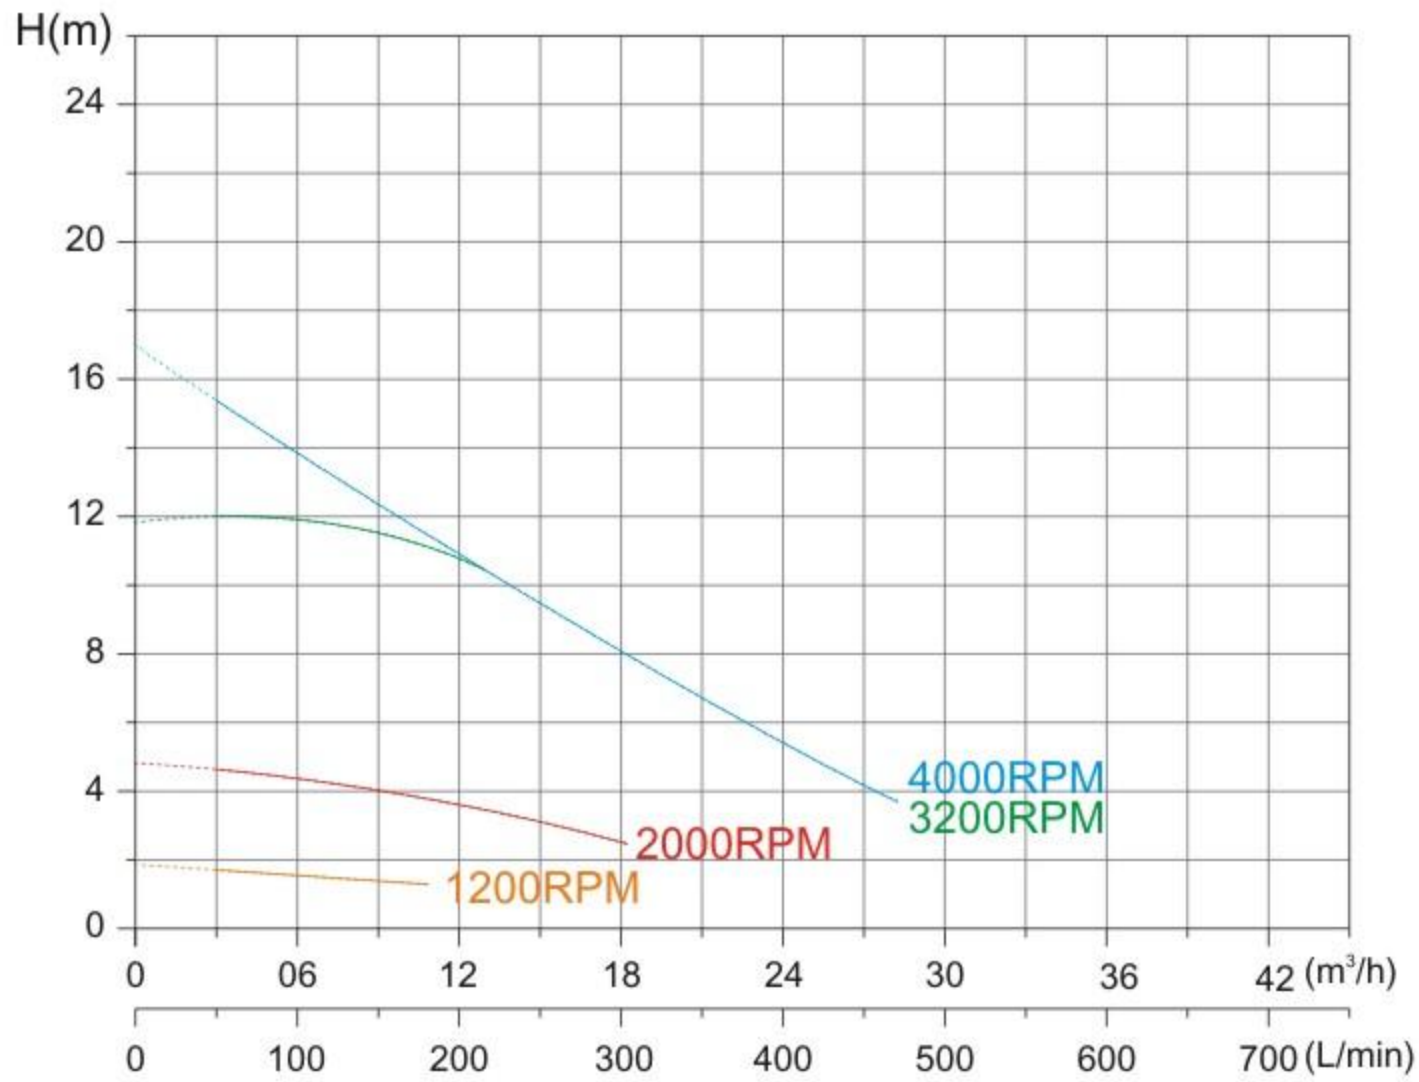


XKP1107BP QH. Curve

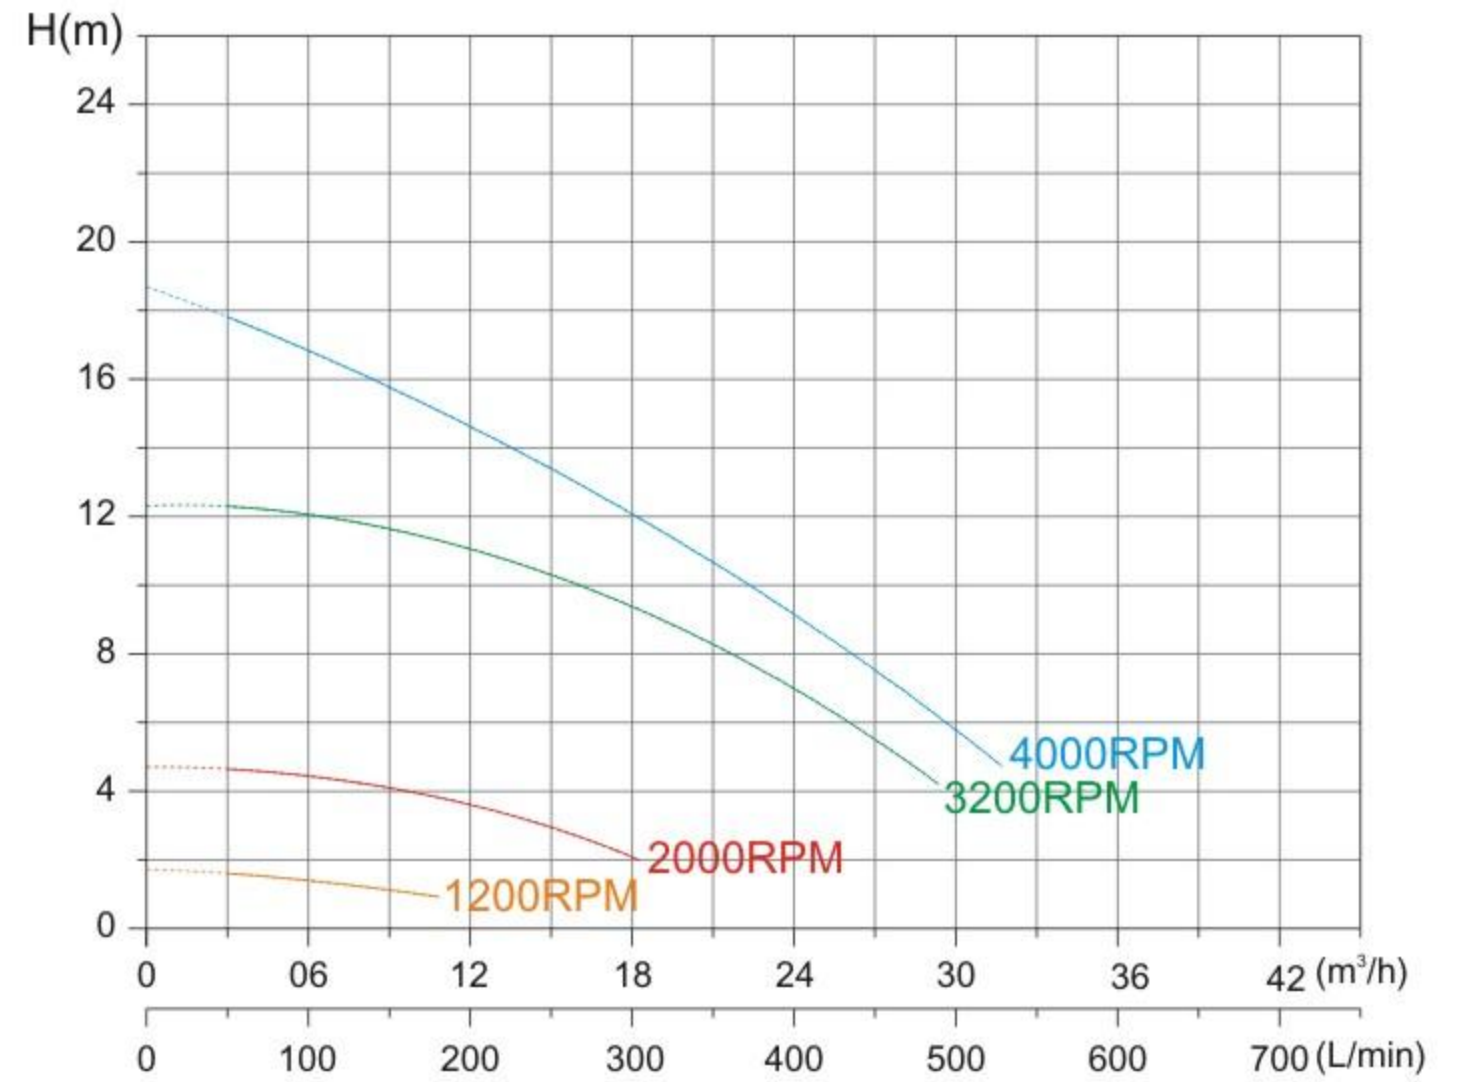


XKP1307BP QH. Curve

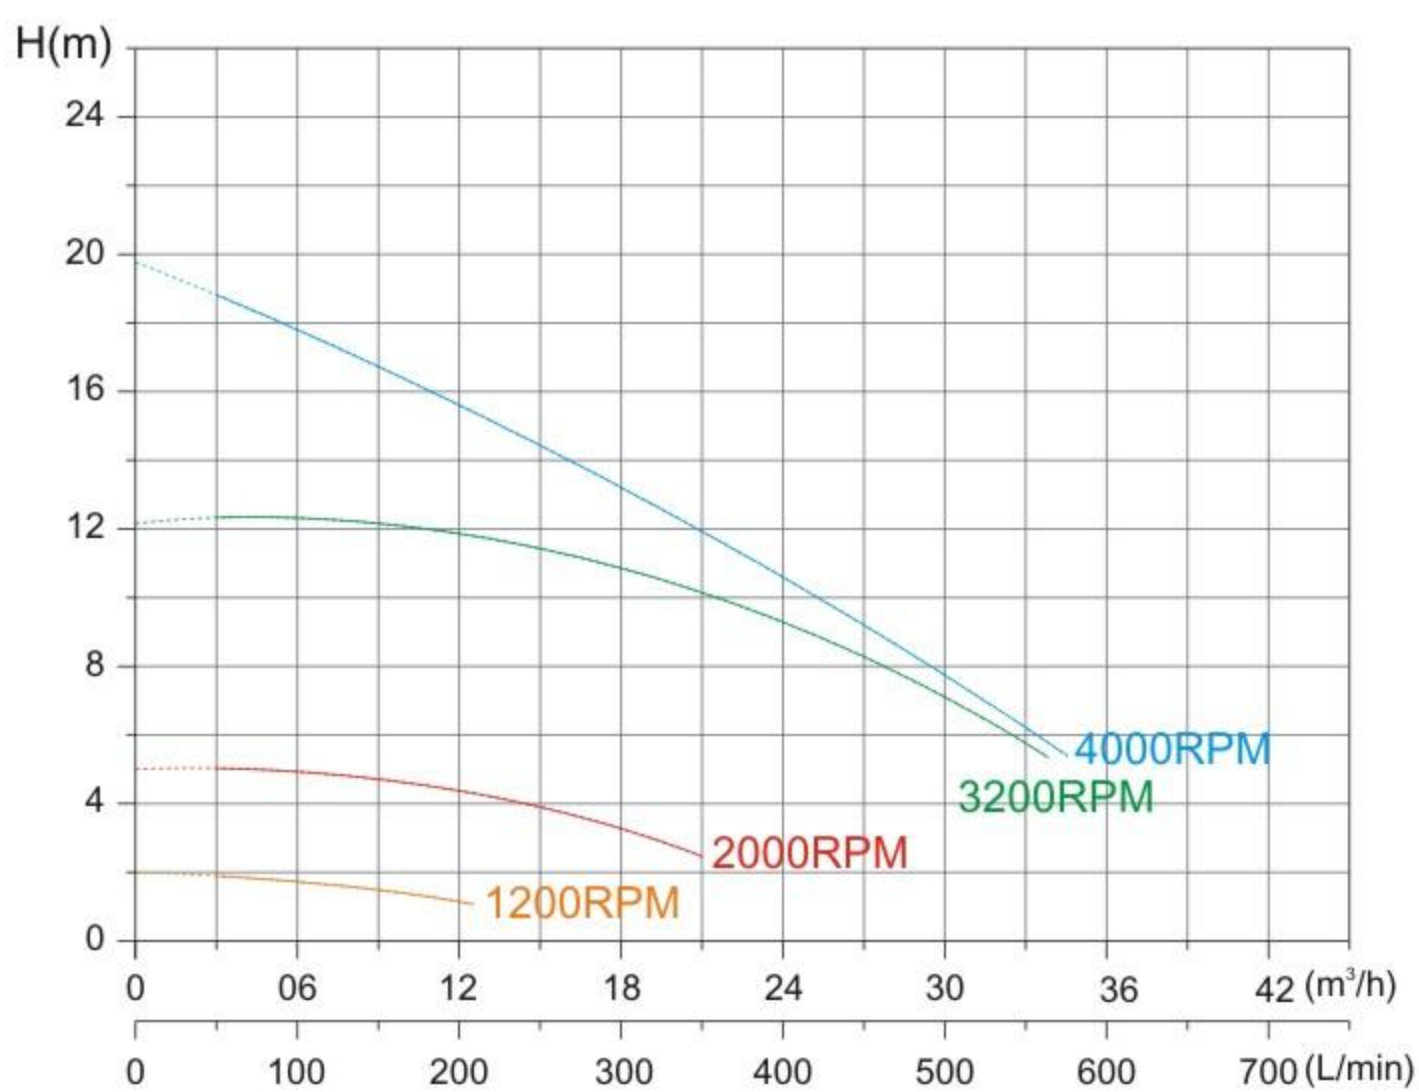


XKP1607BP QH. Curve

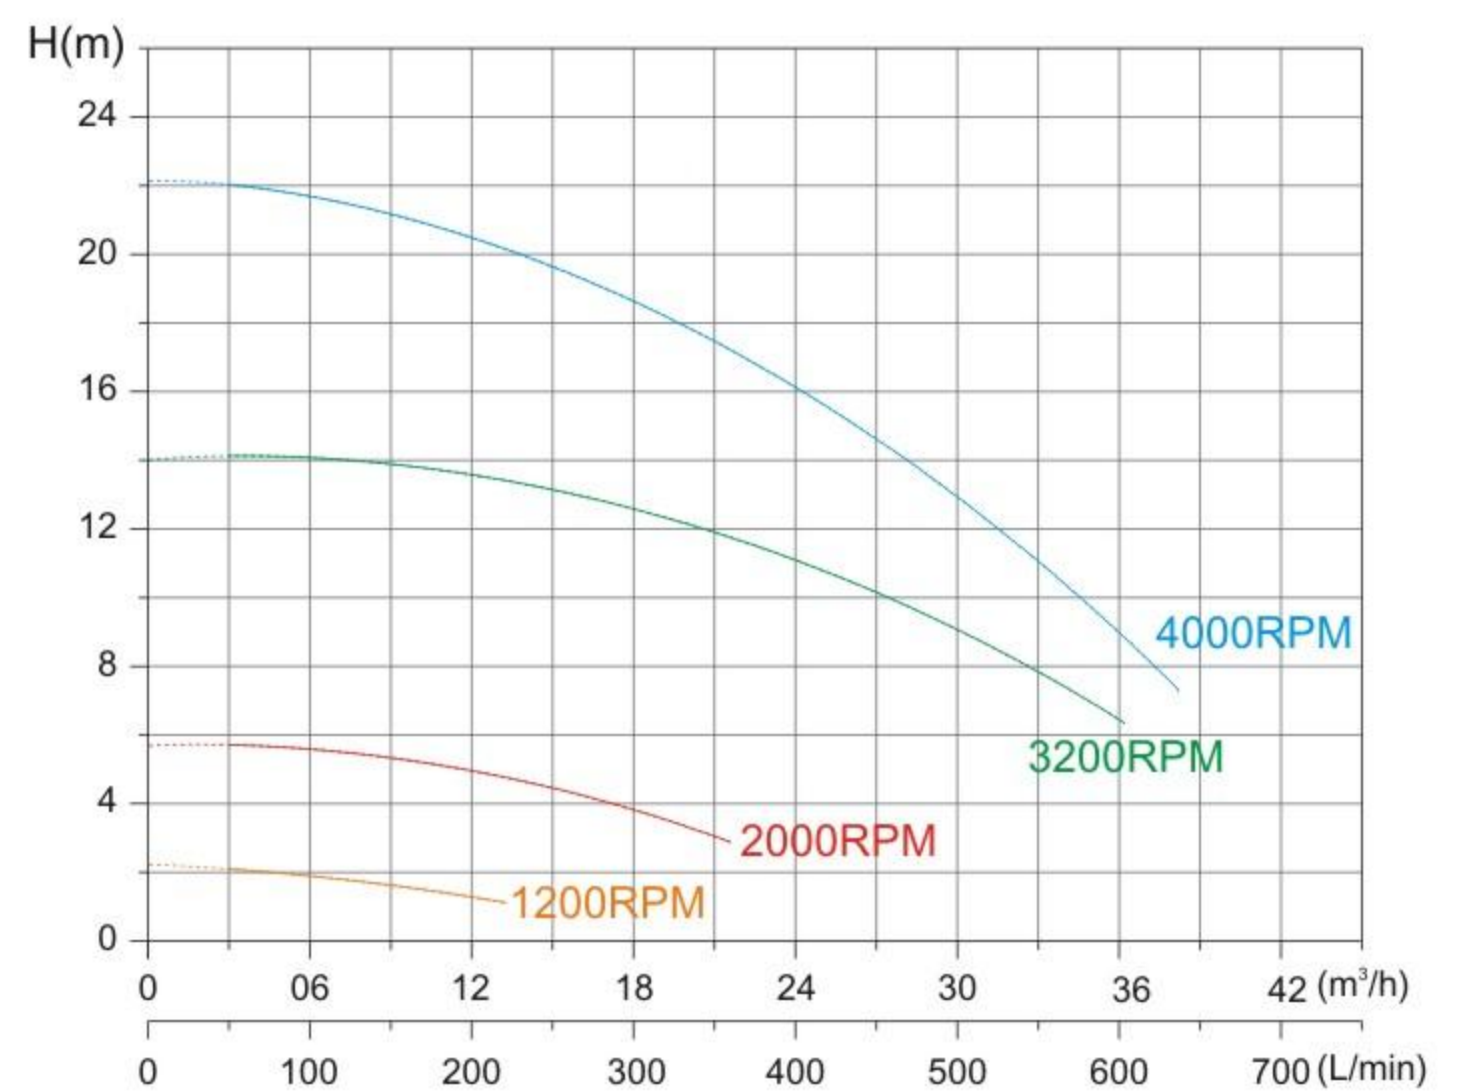


XKP1807BP QH. Curve

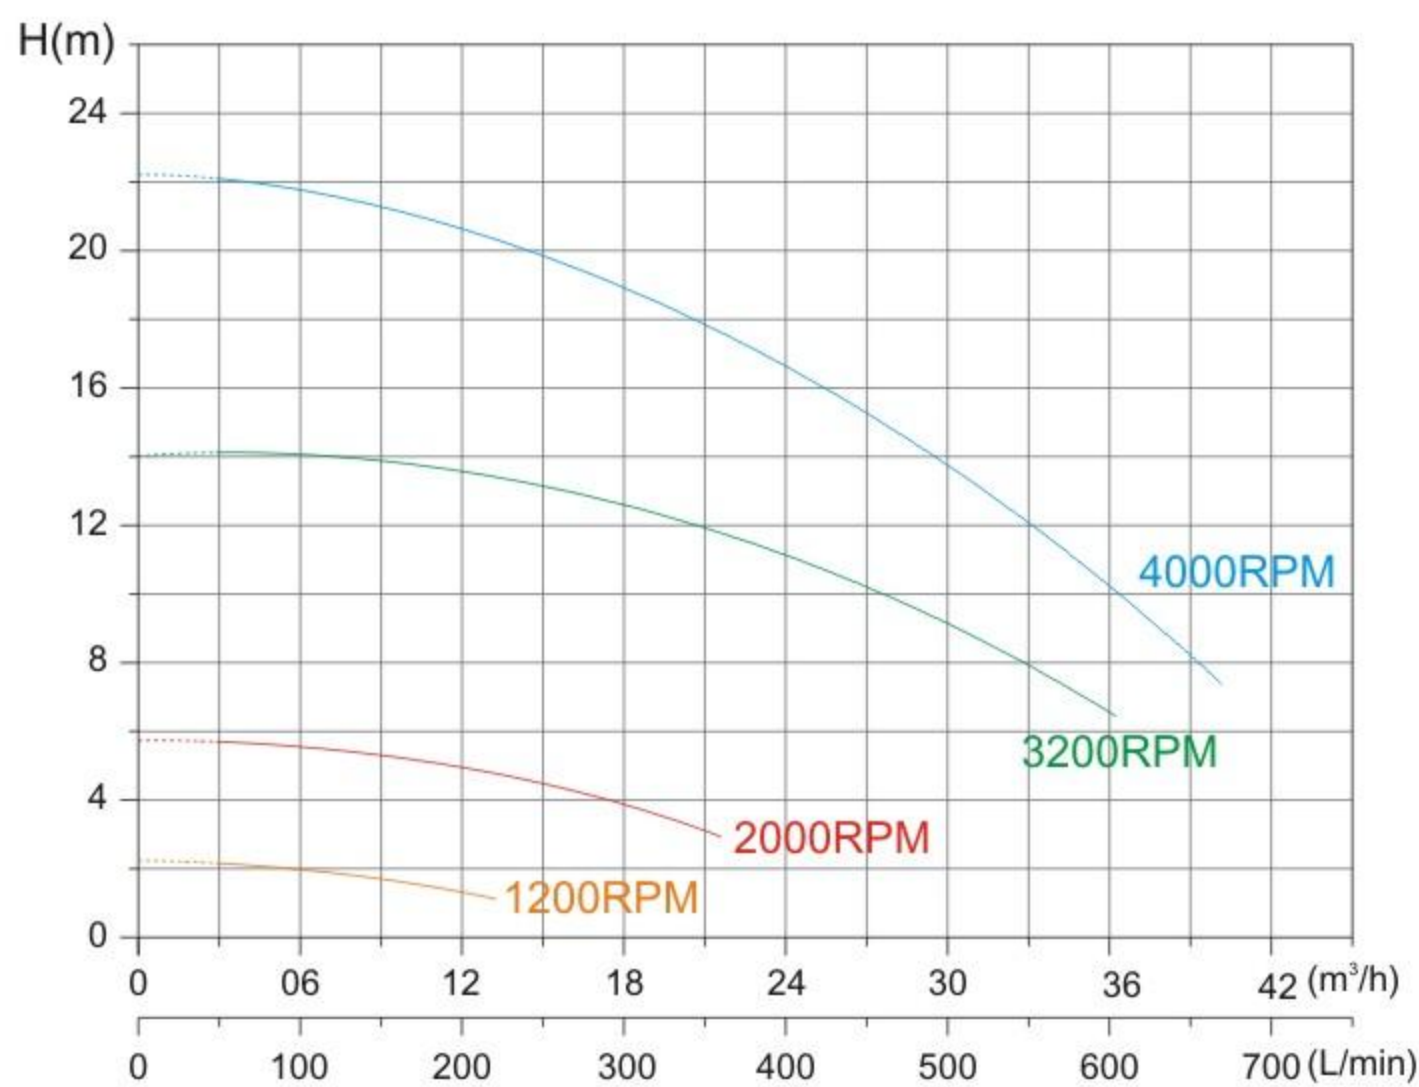

XKP2207BP QH. Curve

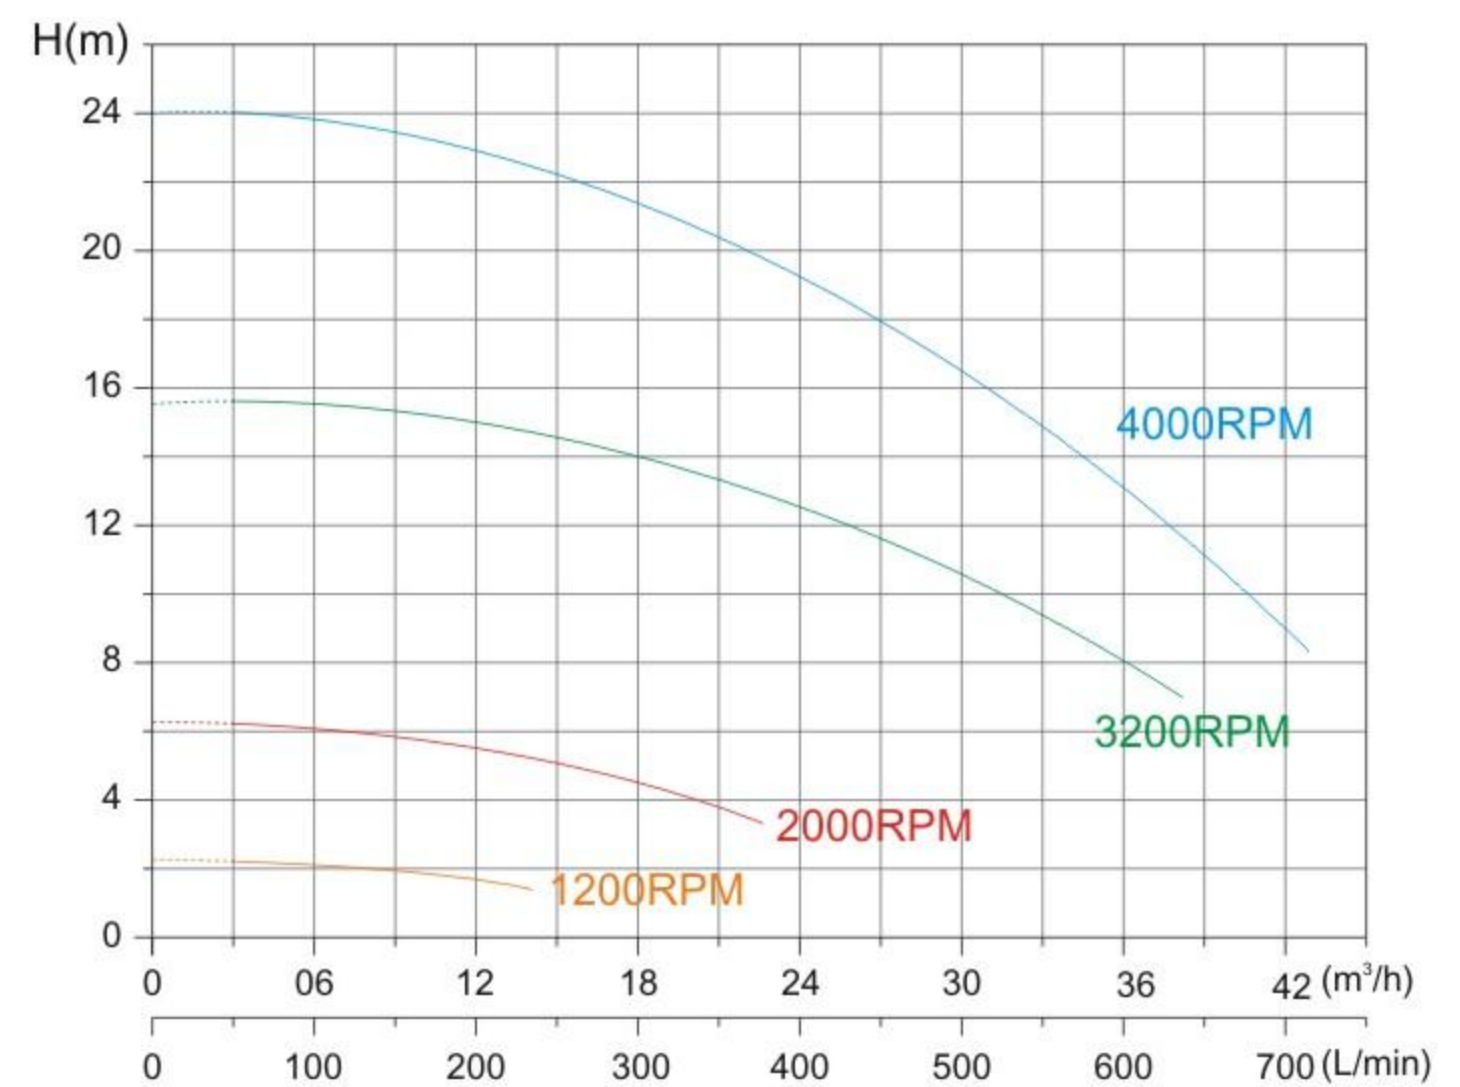

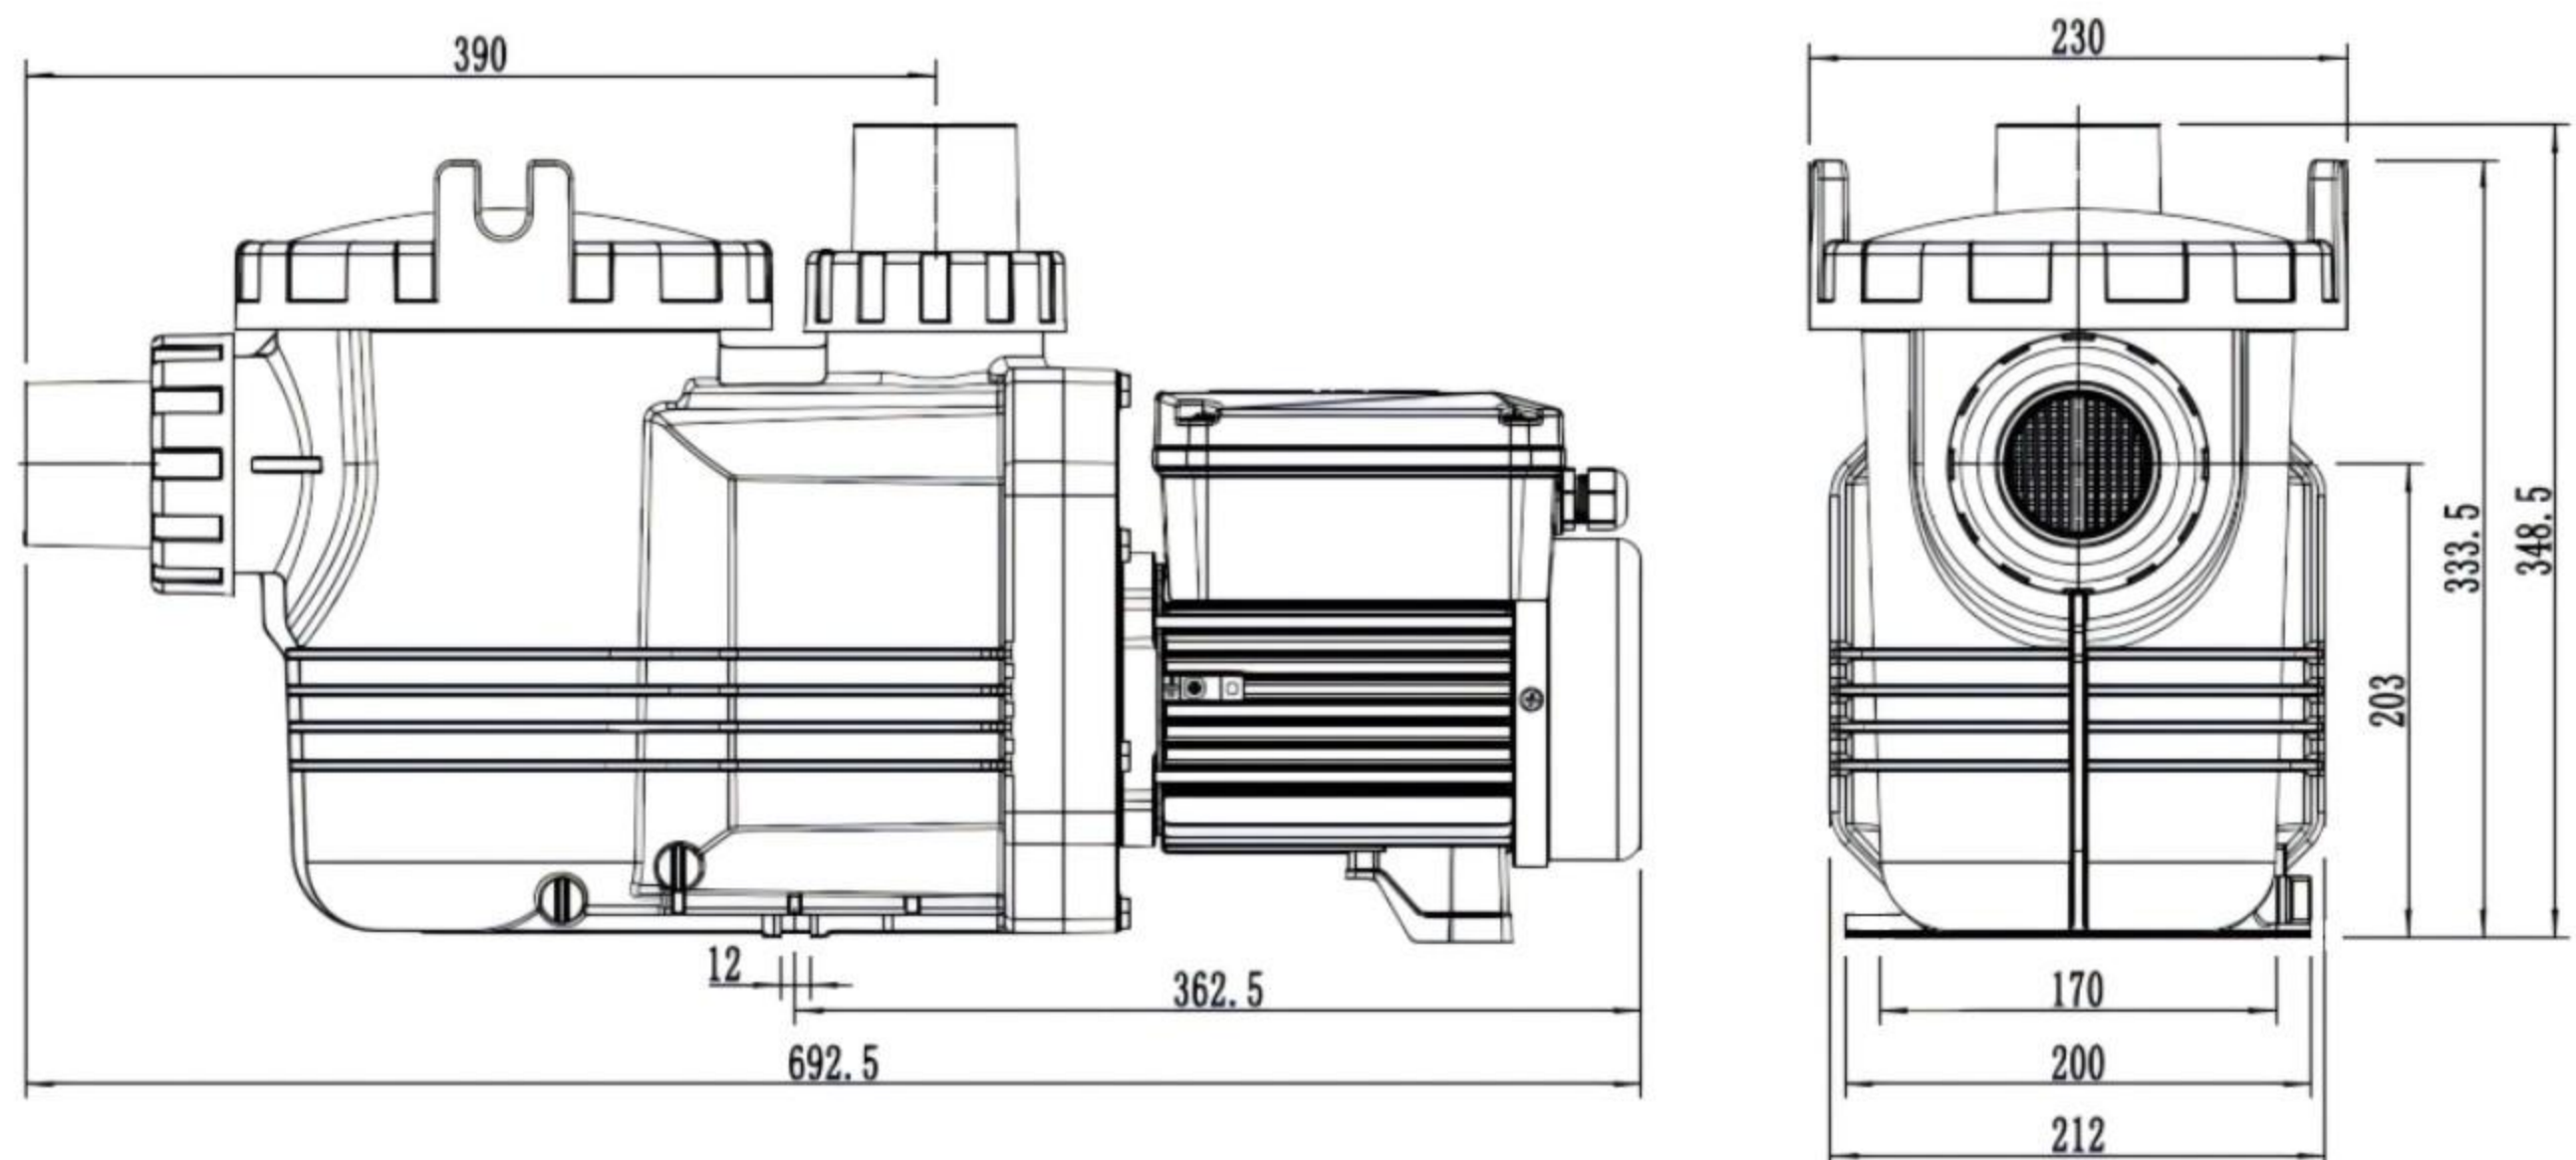

Model	Output power (P1)		Rated power supply	Max.current (A)	RPM	Max.Flow (m³/h)	Max.Head (m)	Flow at 8m (m³/h)	Flow at 10m (m³/h)	Connection Size
	Horse power (HP)	Rated power (kW)								
WL-XKP757BP	1	0.75	220-240V/50/60Hz	3.5	1200-4000	28	17	18	13	2" 63mm
WL-XKP1107BP	1.5	1.1	220-240V/50/60Hz	5	1200-4000	32	18.5	26	22	2" 63mm
WL-XKP1307BP	1.75	1.3	220-240V/50/60Hz	6	1200-4000	34.5	19.5	29	25	2" 63mm
WL-XKP1607BP	2	1.6	220-240V/50/60Hz	7.2	1200-4000	38	22	37	34	2" 63mm
WL-XKP1807BP	2.5	1.8	220-240V/50/60Hz	8	1200-4000	40	22	39	36	2" 63mm
WL-XKP2207BP	3	2.2	220-240V/50/60Hz	9.5	1200-4000	43	24	40	43	2" 63mm

